


MA-250K Microphone Impedance Matching Transformer

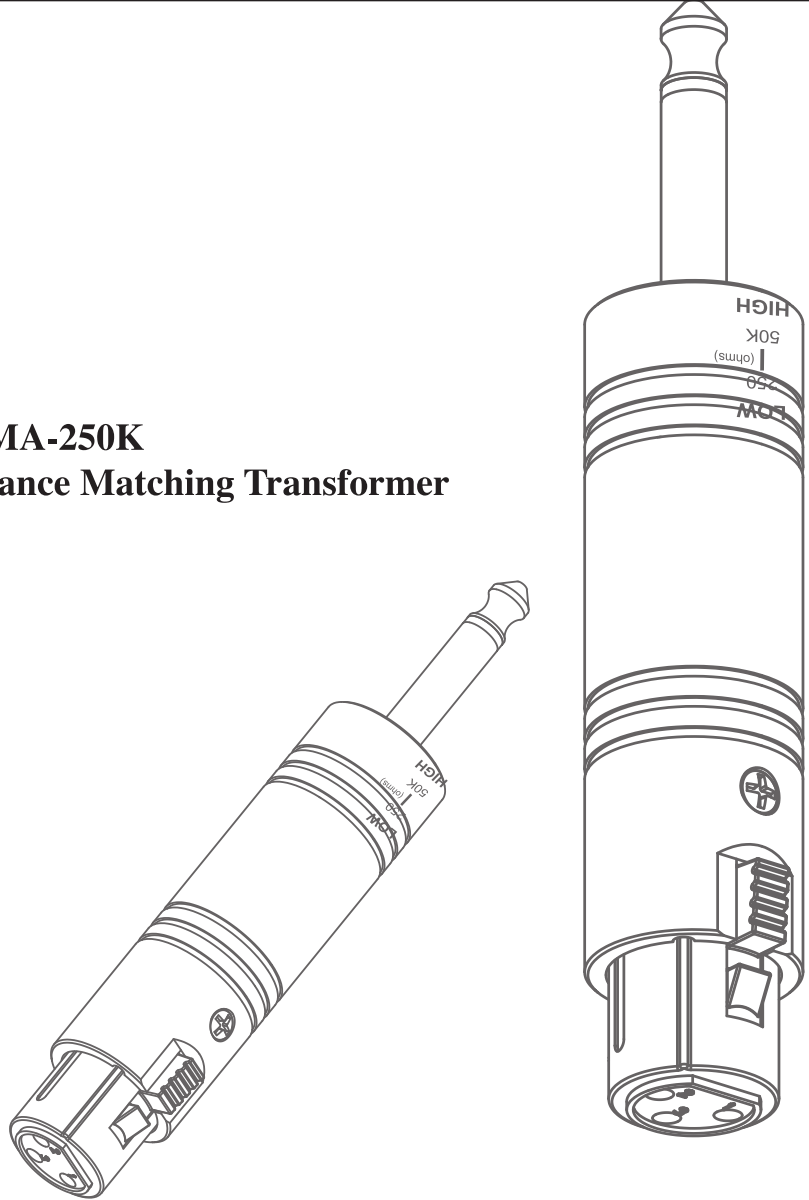

FEATURES

- *Matches a low-impedance microphone to a high-impedance input.
- *Allows use of long microphone cables.
- *Maintains high-frequency response.
- *Reduces noise pickup.
- *Provides 21dB of voltage gain.

ELECTRONIC SPECIFICATION

Input Connector: XLR-Female
Input Impedance: 250 Ω
Output Connector: 1/4" plug
Output Impedance: 50K Ω

SYSTEM SPECIFICATIONS

Frequency Response: 20Hz~20KHz
Net Weight: 45g
Dimension(mm): 110(D)*20(W)*23(H)

DIMENSIONS

